

# 25 - 50000 P

The pneumatic transfer pumps 25000 P and 50000 P have been built after an experience of over 25 years of Taiver in the field! They are ideal for pumping and transferring foodstuffs, self-level liquids and materials, inks, oils, cataphoresis baths, any product with a viscosity up to 100.000 centipoises.

### Construction specifications:

25000 P and 50000 P work with air motors, instant volumetric reversal, Taiver patented, without lubrication with no ice problems. All parts in contact with the product are in stainless steel, therefore suitable for transferring also foodstuffs and acid products. According to the ratio you need it is possible to equip 25000 P and 50000 P with a different motor!


### Performances:

- 25000 P has a delivery of 25 lt/min and, according to the air motor, it can be supplied with a ratio of 6:1 or 16:1
- 50000 P has a delivery of 50 lt/min and, according to the air motor, it can be supplied with a ratio of 3:1 or 7:1

On request it is possible to fit a special high capacity filter in stainless steel.



**50000 P**

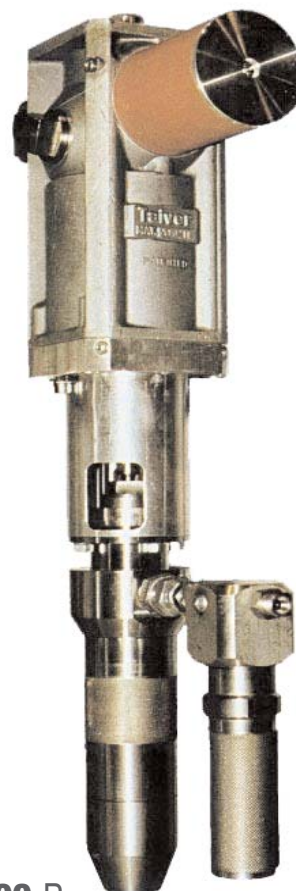

**25000 P**

### Technical Data:

	<b>25000 P</b>	<b>50000 P</b>
- Motor:	Pneumatic motor Instant volumetric reversal	
- Ratio:	6 : 1 - 16 : 1	3 : 1 - 7 : 1
- Weight:	15 Kg - 19 Kg	24 Kg - 28 Kg
- Max. Delivery:	25 lt/min	50 lt/min