

HTP 21000 BI-MIX



Serie **HTP**
Electric airless piston pumps


HTP 21000 BI-MIX

HTP 21000 BI-MIX is an airless hydraulic piston pump ideal for bi-component products with mixing 1:1.

It is the ideal equipment for injecting specific products for strengthening in the buildings renovation. The easy adjustment of the pressure allows to inject from low to high pressure (up to 100 Bar) without problems.

HTP 21000 BI-MIX in the version with 9 ltr/min delivery, besides injection, it is ideal for spraying bi-component products (mixing 1:1).

Ideal for injecting bi-component products for the water-barrage in the tunnel.

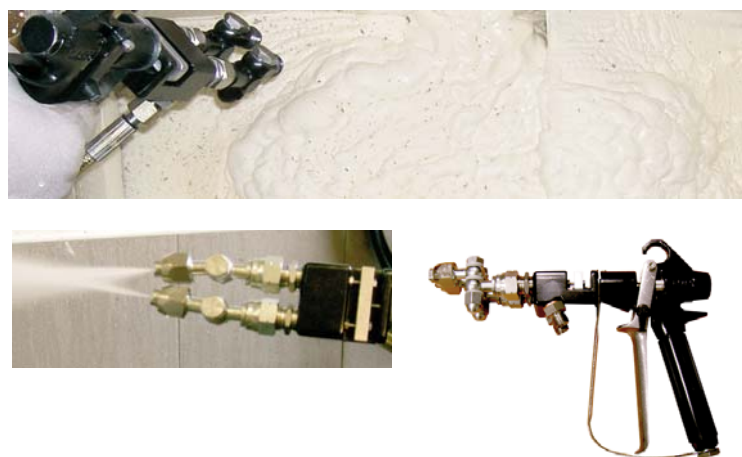

Technical Data:

		BI-MIX 9 LTR	BI-MIX 18 LTR
Volt		230 Volt	230 Volt
		50 Hz	50 Hz
Power		3 HP	3 HP
Mixing Ratio		1:1	1:1
Max. Free Flow Delivery	ltr/min	9	18
	Max. Delivery with tip	ltr/min	7,5
Max. Spray Tip	1 Gun	---	---
	2 Guns	0,021	---
	3 Guns	---	---
Max. Working Pressure (bar)		220	120
Max. length HP hose mt.		40	40
Max. length HP hose (elevation) mt.		40	40
Weight	kg.	100	120
Max. suggested Viscosity (Centipoise)		600	600

Target Coatings:

	BI-MIX 9 LTR	BI-MIX 18 LTR
Lacquer / varnish / enamel (low visc)	■	■
Primer / latex / enamel (med. visc)	■	■
2 component (med. visc.)	■	■
Low solvent & solvent free coatings (high visc)	■	■
Insulation and high build coatings	■	■
Fire-proofing coatings	■	■
Water-proofing coatings / bituminous coatings	■	■
Plasters / ready-mix gyps	■	■
Resins / Injection's coatings	■	■