

HTP 21000

The airless system allows a faster atomization and reduces the overspray, therefore a paint and solvent saving. Less overspray means also less pollution with benefits for the worker's health!

TAIVER HTP 21000 is the newest pump from the wide TAIVER range. It has been designed for spraying all kind of tixotropic products in Building, Water-proofing application, industrial carpentry, etc... It is ideal for plaster-applicators who want to have a new technology for plaster applications or stucco-works on walls. TAIVER HTP 21000 allows the maximum efficiency and a long life!!


Performances:

- Ideal for big jobs!!
- Slower and longer cycles to improve the life of the pump
- Hydraulic system at very high volume in order to grant a perfect performance even in hard work's conditions
- The cylinder and the relief valve have a manual start as to offer an easy and fast maintenance
- Piston and cylinder are in hard chrome for a long life
- New system of self-adjusting packings which avoid the premature wear due to continuous manual adjustments

Construction specifications:

The electric motor is H class, that means: maximum quality and safety. It can work in very bad conditions and with very high temperature. An automatic system stops the pump when exceeding the electric safety limits. All parts in contact with the product are in stainless steel in order to grant the highest performance. HTP 21000 has been designed for an easy maintenance.

Pressure Diagram:

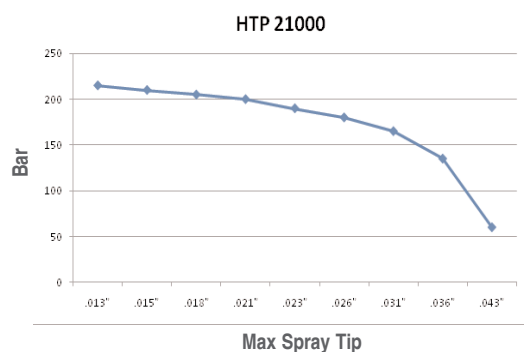

Technical Data:

- Motor Type: Electric, singlephase
Electric, threephase
- Volt: 220 Volt/50 Hz
380 Volt /50 Hz
- Power: 3 HP
- Weight: 96 kg
- Max. Pressure: 220 bar - 220 Volt
270 bar - 380 Volt
- Max. Spray Tip: .041"
- Max. Delivery: 6,5 lt/min.



TAIVER S.r.l.
Via F.lli Cervi, 2
20040 Burago Molgora (MI) - ITALY
Tel. +39 039 59.68.280/281
Fax. +39 039 59.68.283
taiver@taiver.com

