

HTP 4000 Rasospray

The airless system allows a faster atomization and reduces the overspray, therefore a paint and solvent saving. Less overspray means also less pollution with benefits for the worker's health!

The unique electronic system together with the performance of the electric motor D.C. allow to spray prepared and smooth stucco and plaster, without the mechanical use of American spatula or glass paper! HTP 4000 RASOSPRAY is the ideal pump for building, carpentry, mechanics and woodworks. Ideal also for spraying thick and thixotropic products, prepared and washable white-ning, latex, etc.

Safe work:


The unique automatic system of HTP 4000 RASOSPRAY ensures that the pump stops when paint runs out or any other inconvenience with hoses or fittings.

Electronic digital/analogue:

The electronic circuit digital/analogue allows a perfect adjustment of pressure and delivery without surging, with consequent perfect quality of atomization!

Construction specifications:

HTP 4000 RASOSPRAY has a powerful electric motor D.C. which assures a high performance in the total security, thanks to the technological features of "security system". The motor is controlled by the electronic circuit digital/analogue. The gear box has been built with a very strong and silent system.

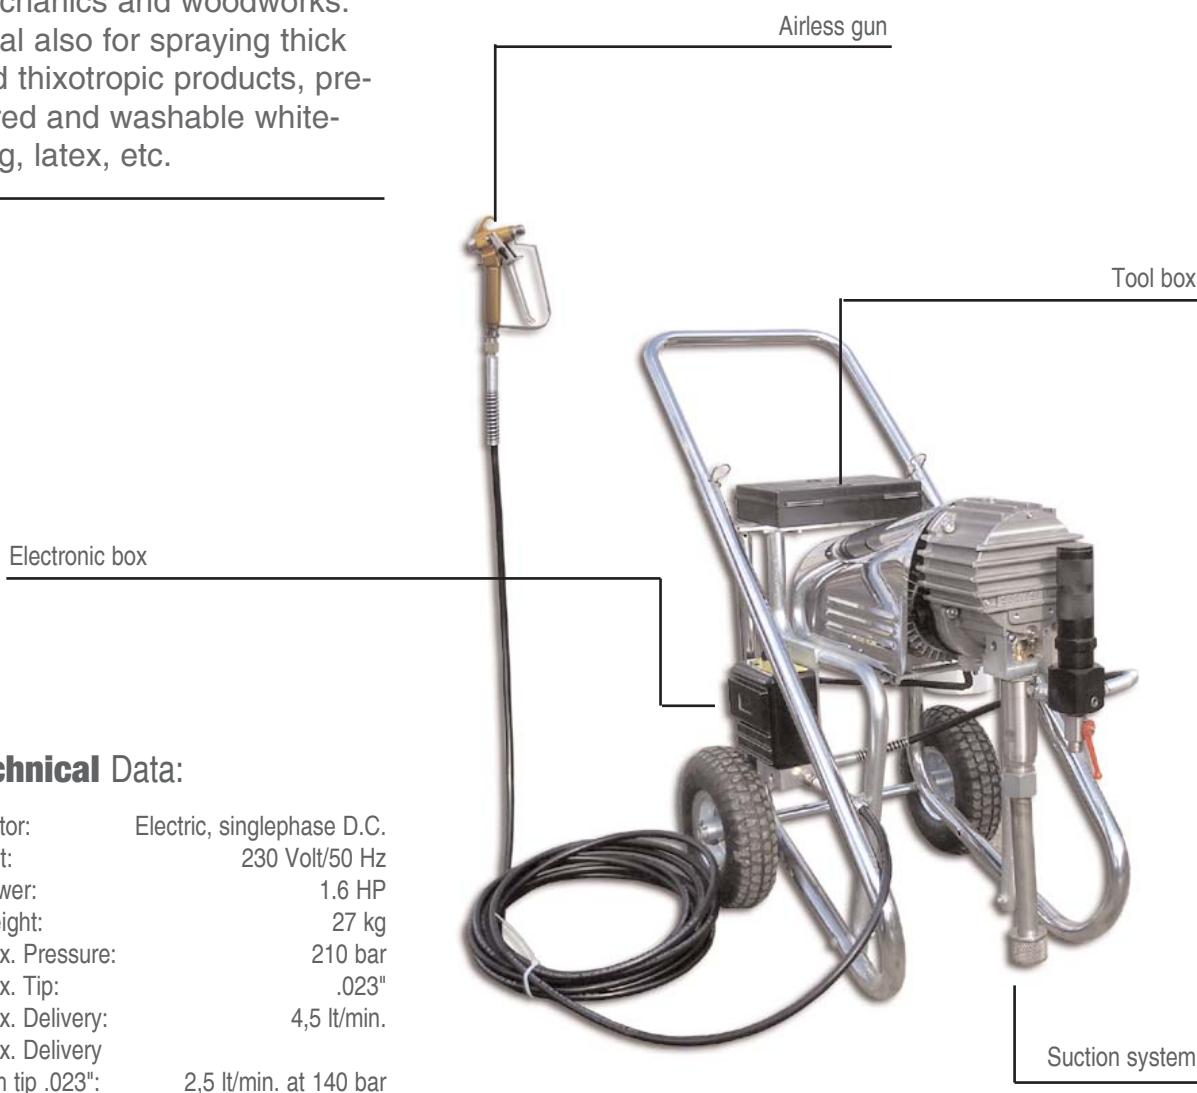

Technical Data:

- Motor:	Electric, singlephase D.C.
- Volt:	230 Volt/50 Hz
- Power:	1.6 HP
- Weight:	27 kg
- Max. Pressure:	210 bar
- Max. Tip:	.023"
- Max. Delivery:	4,5 lt/min.
- Max. Delivery with tip .023":	2,5 lt/min. at 140 bar

TAIVER S.r.l.
Via F.lli Cervi, 2
20040 Burago Molgora (MI) - ITALY
Tel. +39 039 59.68.280/281
Fax. +39 039 59.68.283
taiver@taiver.com

