

GOLD 6500



Serie **GOLD**
Electric airless diaphragm pump

GOLD 6500

GOLD 6500 is an airless electric diaphragm pump, medium power, designed for spraying all products used in building, mechanics, wood-workings, carpentry, etc.

This is a very strong and handy pump with a very easy maintenance. GOLD 6500 can work constantly also with hoses up to 100 mt long.

Construction specifications:

The electric motor GOLD 6500 is H class, that means: maximum quality and safety. It can work in very bad conditions and with very high temperature. An automatic system stops the pump when exceeding the electric safety limits. The head block is in stainless steel, the valves are in tungsten carbide. GOLD 6500 has been designed for an easy maintenance.

The airless system allows a high working speed and reduces the overspray, therefore paint and solvent saving. Less overspray means also less pollution and benefits for the worker's health!


Target Coatings:

Lacquer / varnish / enamel (low visc)	■
Primer / latex / enamel (med. visc)	■
2 component (med. visc.)	■
Low solvent & solvent free coatings (high visc)	■
Insulation and high build coatings	■
Fire-proofing coatings	■
Water-proofing coatings / bituminous coatings	■
Plasters / ready-mix gyps	■
Resins / Injection's coatings	■

Technical Data:

Volt	230 Volt	380 Volt
	50 Hz	50 Hz
Power	2 HP	2 HP
Mixing Ratio	---	---
Max. Free Flow Delivery	ltr/min 7,5	7,5
Max. Delivery with tip	ltr/min 4,5	4,5
	1 Gun 0,036	0,036
Max. Spray Tip	2 Guns 0,019	0,019
	3 Guns ---	---
Max. Working Pressure (bar)	220	220
Max. length HP hose mt.	100	100
Max. length HP hose (elevation) mt.	100	100
Weight	kg. 41	41
Max. suggested Viscosity (Centipoise)	400	400

Pressure Diagram:

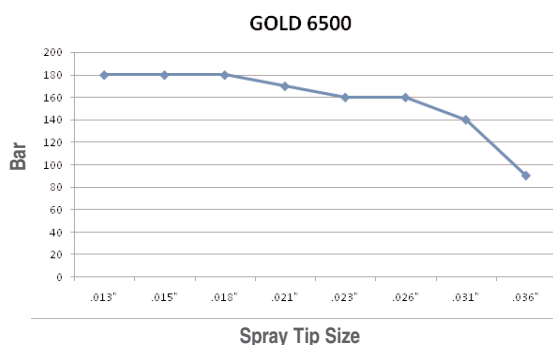

Suggested accessories



TAIVER INT. S.r.l.
Via F.lli Cervi, 2
20875 Burago Molgora (MB) - ITALY
Tel. +39 039 59.68.280/281
Fax. +39 039 59.68.283
taiver@taiver.com

